

Mirror #6
25 August 2016
Robert C. Romeo
Composite Mirror Applications, Inc.


1) Specifications

Mirror Designation: #6

Dimensions:

(Projected linear distance)

(Thickness)

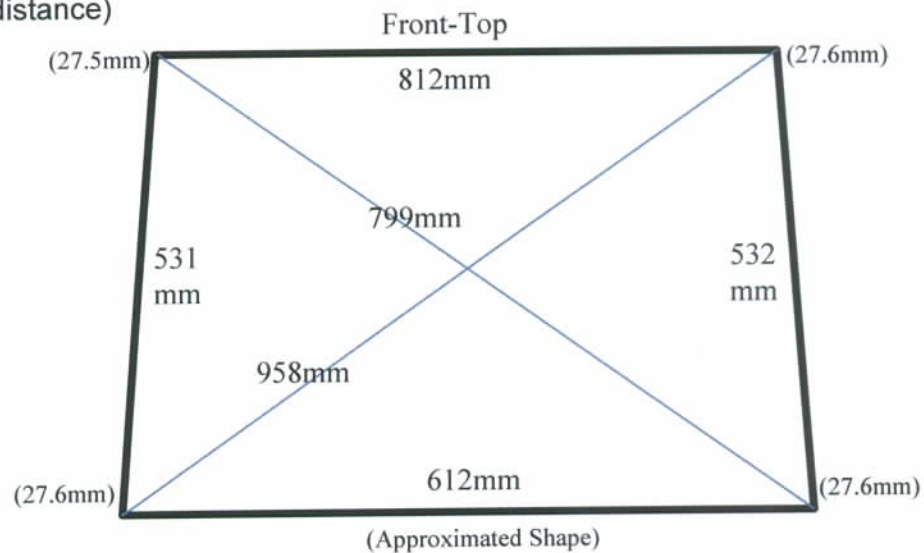

Weight: 1625 gms

Radius of Curvature: 2710mm

Areal Density: 4.2 kg/m²

40mm Samples: 48-52

Voids: 5 at .5mm diameter


Total void Area: .98mm²
(Note: Mirror area approximated by smallest X and Y dimensions as worst case.)

Worse Case Mirror Area: 612mm X 532mm = 325,584mm²

Area loss due to Surface voids (requirement < 0.01 %): 0.0000030mm² (.00030%)
Meets Requirement

Processing Temp and RH: 84.3°F 38.8% RH

Spot Dimensions: <2.5mm (each square = 2.5mm X 2.5mm)

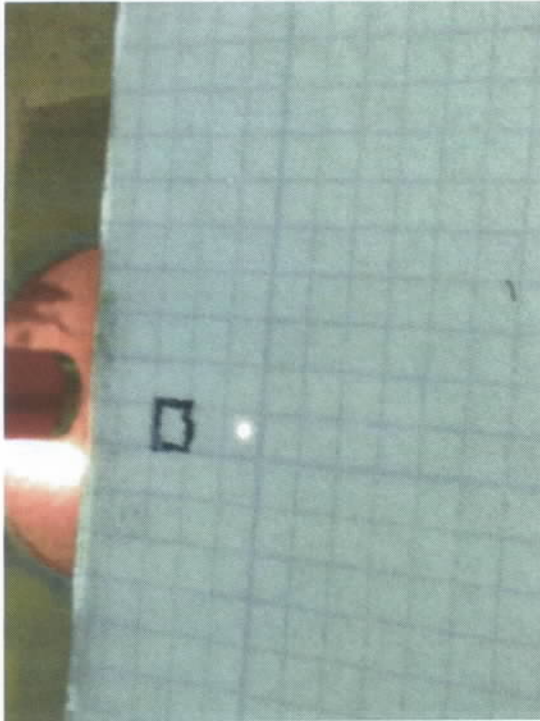

Surface Measurement #1: 400mm X 400mm area

Not Attainable - Hardware issues

Surface Measurement #2: 500mm X 500mm area

Not Attainable - Hardware issues