
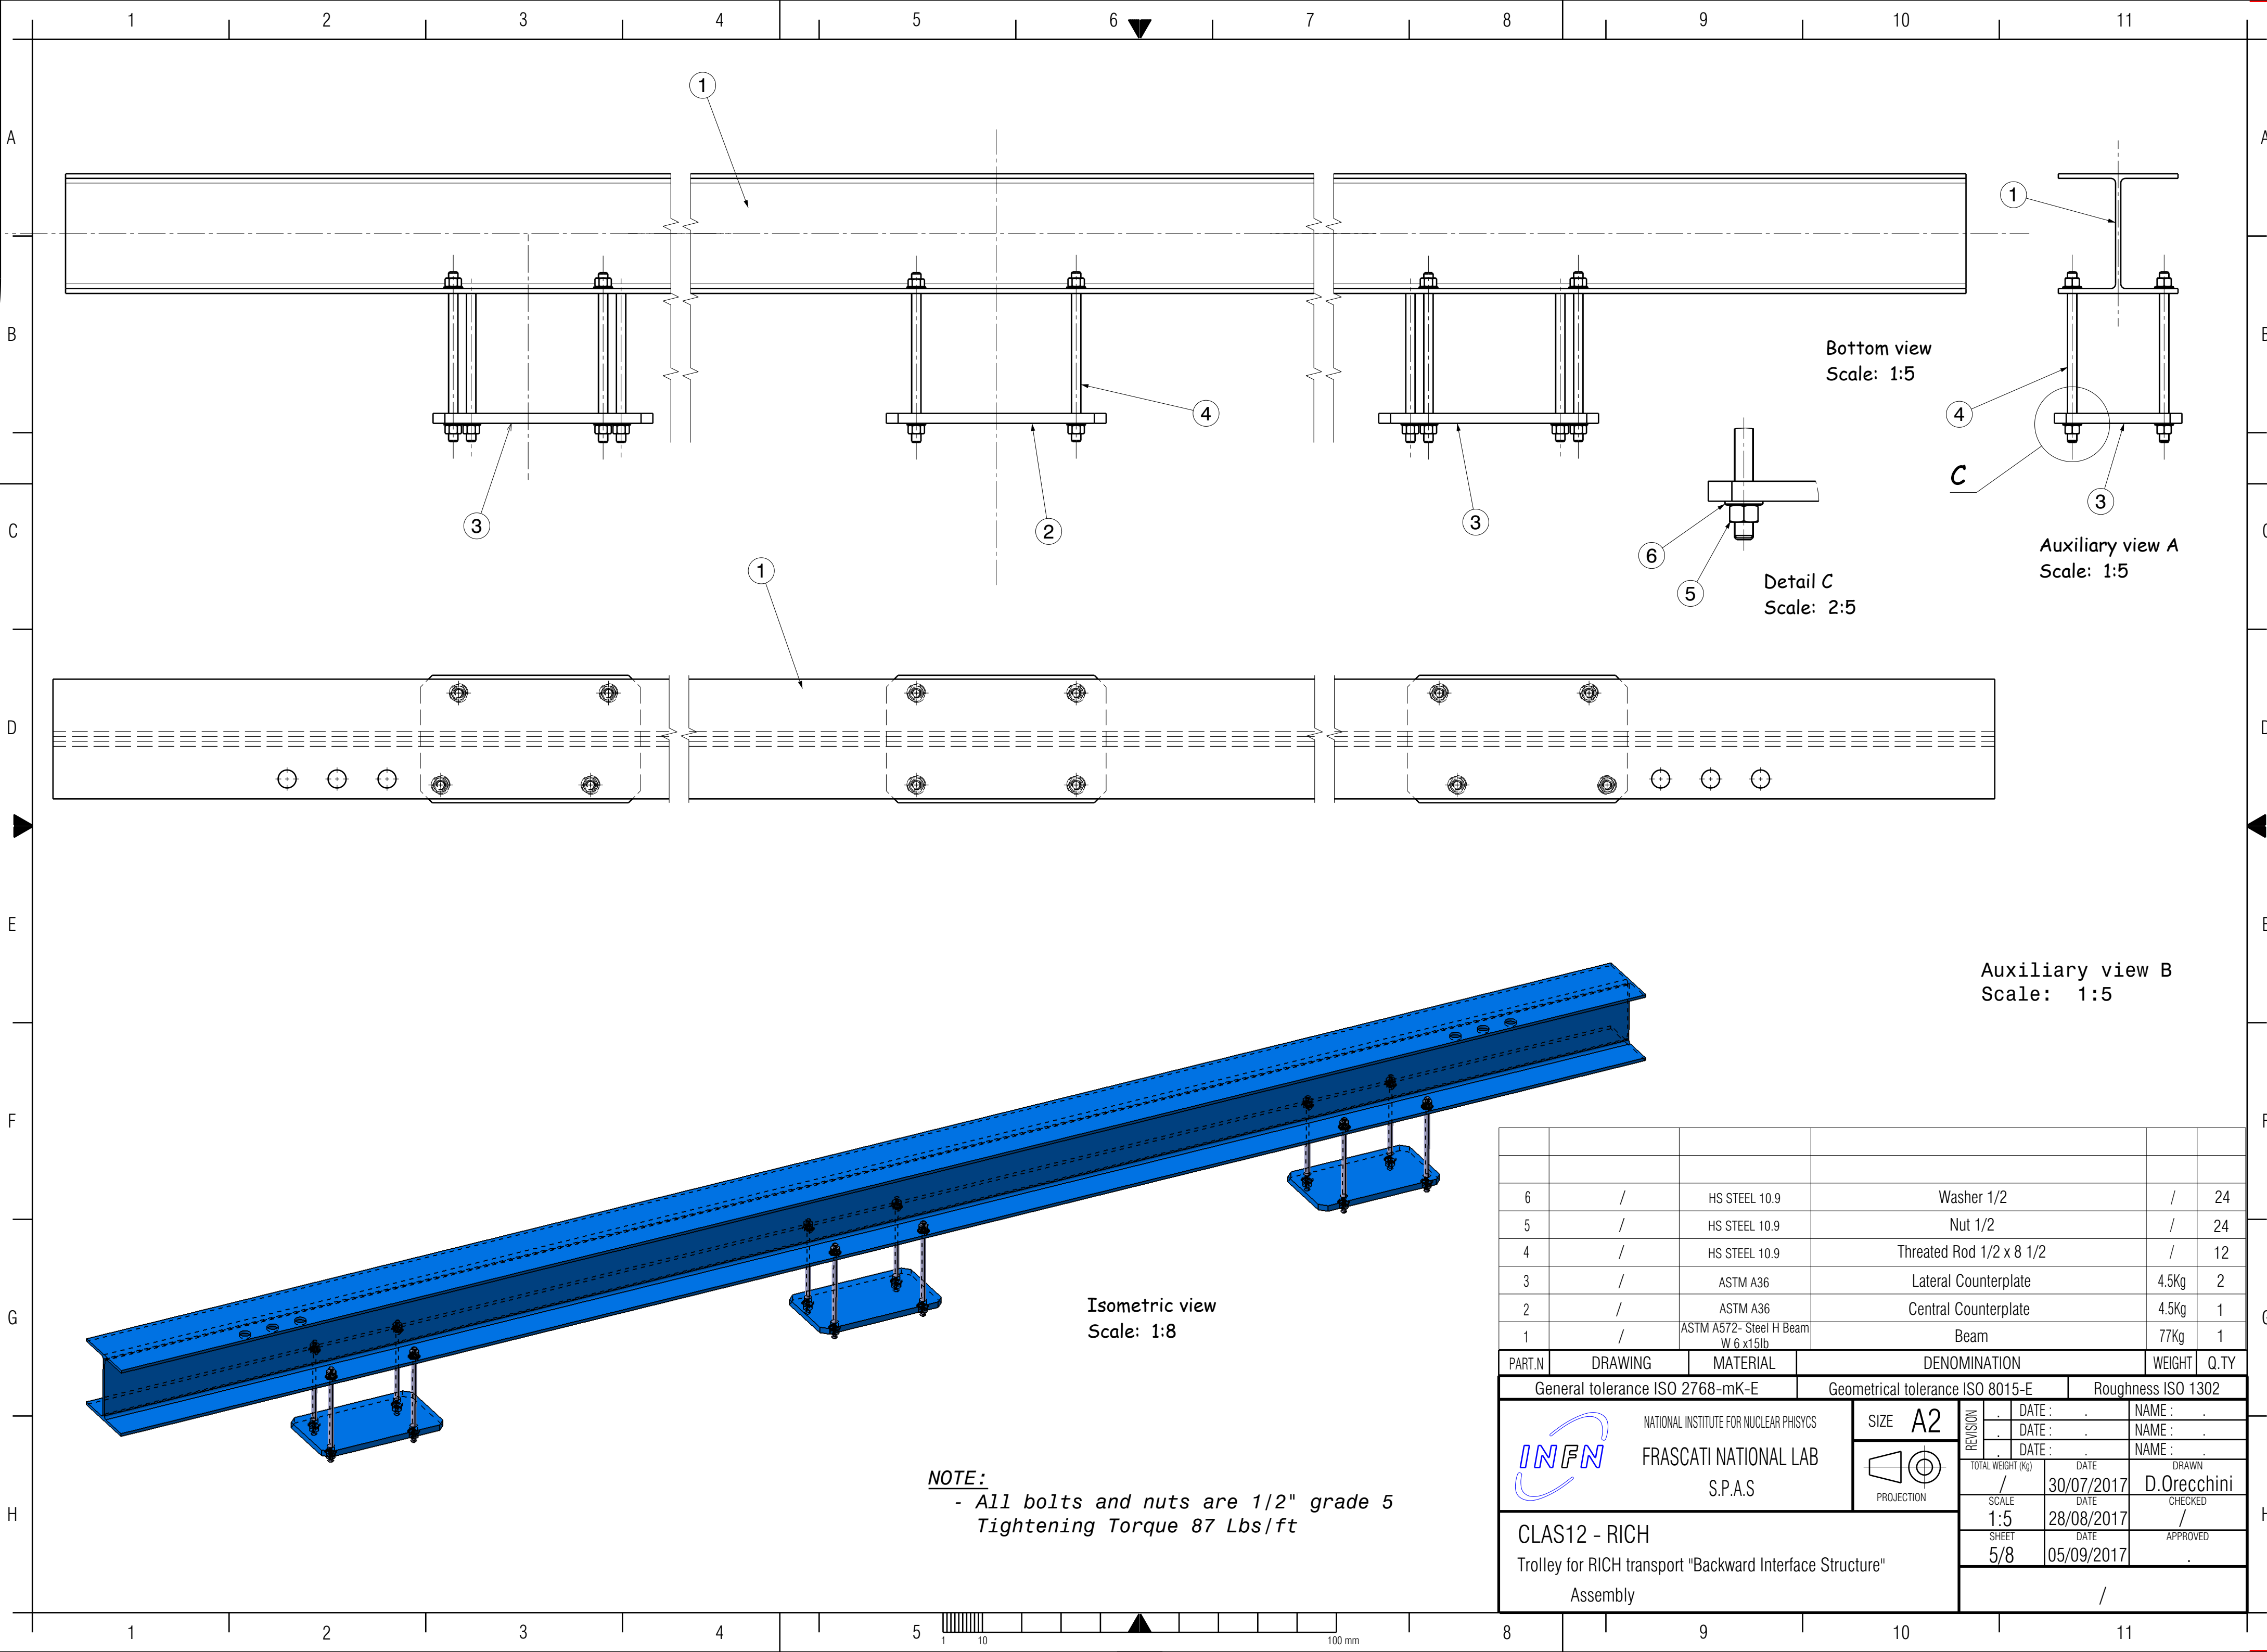




NOTE:
- All bolts and nuts are 1/2" grade 5
Tightening Torque 87 Lbs/ft

6	/	HS STEEL 10.9	Washer 1/2	/	24
5	/	HS STEEL 10.9	Nut 1/2	/	24
4	/	HS STEEL 10.9	Threated Rod 1/2 x 8 1/2	/	12
3	/	ASTM A36	Lateral Counterplate	4.5Kg	2
2	/	ASTM A36	Central Counterplate	4.5Kg	1
1	/	ASTM A572- Steel H Beam W 6 x15lb	Beam	77Kg	1
PART.N	DRAWING	MATERIAL	DENOMINATION	WEIGHT	Q.TY
General tolerance ISO 2768-mK-E		Geometrical tolerance ISO 8015-E		Roughness ISO 1302	
 NATIONAL INSTITUTE FOR NUCLEAR PHYSICS FRASCATI NATIONAL LAB S.P.A.S		SIZE A2  PROJECTION		REVISION	NAME :
				DATE :	NAME :
CLAS12 - RICH Trolley for RICH transport "Backward Interface Structure"		SHEET 5/8		TOTAL WEIGHT (Kg) /	DATE 30/07/2017
				SCALE 1:5	DATE 28/08/2017
Assembly		/		CHECKED	DRAWN
				APPROVED	NAME :
				DATE 05/09/2017	NAME :