

POSITRON BEAMS AT Ce⁺BAF*

J. Grames¹, L. Cardman¹, S. Covrig¹, J. Benesch¹, M. Bruker¹, P. Ghoshal¹, S. Gopinath¹, J. Gubeli¹, S. Habet^{1,2}, C. Hernandez-Garcia¹, A. Hofler¹, R. Kazimi¹, F. Lin³, S. Nagaitsev¹, M. Poelker¹, B. Rimmer¹, Y. Roblin¹, V. Lizarraga-Rubio⁴, A. Seryi¹, M. Spata¹, A. Sy¹, D. Turner¹, A. Ushakov¹, C.A. Valerio-Lizarraga⁴, E. Voutier²

¹Thomas Jefferson National Accelerator Facility, Newport News, VA 23606, USA

²Oak Ridge National Laboratory, Oak Ridge, TN 37830, USA

³Université Paris-Saclay, CNRS/IN2P3/IJCLab, 91405 Orsay, France

⁴Universidad Autónoma de Sinaloa, 80010 Culiacán, México

Abstract

We present a scheme for the generation of a high polarization positron beam with continuous wave (CW) bunch structure for the Continuous Electron Beam Accelerator Facility (CEBAF) at Jefferson Laboratory (JLab). The positrons are created in a high average power conversion target and collected by a CW capture linac and DC solenoid.

INTRODUCTION

The CEBAF accelerator has provided high energy spin polarized electron beams for almost 30 years. Today, JLab is exploring an upgrade which would provide high energy spin polarized positron beams to address new physics [1, 2].

A relatively new technique referred to as PEPPo (Polarized Electrons for Polarized Positrons) has been adopted [3] to generate the positrons. Here the spin polarization of an electron beam is transferred by polarized bremsstrahlung and polarized e^+e^- pair creation within a high-power rotating tungsten target.

In this scheme two accelerators are used (see Fig. 1). First, the Jefferson Lab Low Energy Recirculator Facility (LERF) building (see Fig. 2) is repurposed to take advantage of existing electrical, cryogenic, and shielding facilities. A high current >1 mA spin polarized CW electron beam is produced, accelerated to an energy of 120 MeV and transported to the high-power target to generate the spin polarized positrons. Afterwards, the positrons are collected to maximize intensity or polarization, bunched and re-accelerated to 123 MeV. Finally their spin direction may be adjusted in a novel spin rotator. Once the positron beam exits the LERF it is transported from ground level through a new beam line to the CEBAF accelerator tunnel underground. There it is transported half-way around the accelerator and injected as a usual electron beam would from the existing CEBAF electron injector. The positrons are then accelerated to 12 GeV and may be extracted at any pass (intermediate energies) to any of the four halls.

* This project is supported by the U.S. Department of Energy, Office of Science, Office of Nuclear Physics under contract DE-AC05-06OR23177; UT-Battelle, LLC, under contract DE-AC05-00OR22725 with the US Department of Energy (DOE); the European Union's Horizon 2020 research and innovation program under agreement STRONG - 2020 - No. 824093; the Programa de Fomento y Apoyo a Proyectos de Investigación code A1-022, from the Universidad Autónoma de Sinaloa.

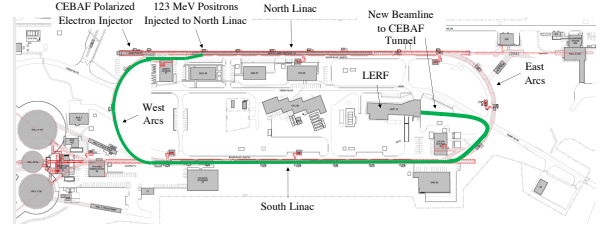


Figure 1: CEBAF and LERF accelerators. Green line shows the new 123 MeV transport beam line connecting LERF to CEBAF for high energy acceleration of positron beams.

The Ce⁺BAF design is optimized to provide users with spin polarization $>60\%$ at intensities >100 nA, and with higher intensities when polarization is not needed.

LERF

Polarized Electron Injector

The existing LERF injector provides the baseline layout with the superconducting quarter cryomodule (Capture Linac: SRF 10 MV) capable of accelerating up to 10 mA CW beams to 9 MeV/c [4]. Upstream of the Capture Linac, the layout will resemble that in CEBAF, albeit more compact starting with the polarized electron source, followed by a Wien spin rotator and a buncher cavity for longitudinal matching to the SRF 10 MV. Downstream of the SRF 10 MV, a three dipole magnet chicane injects the electron beam into the first of two full-length accelerating SRF cryomodules (60 MV each). The LERF electron gun will be

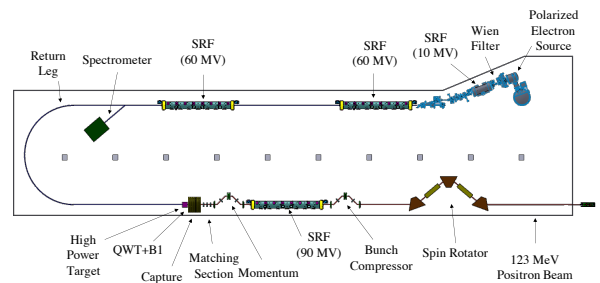


Figure 2: LERF layout of polarized e^- and e^+ injectors.

a scaled-up version of the 130 keV inverted geometry gun

used at CEBAF for many years [5]. The CEBAF gun reliably provides highly spin polarized electron beams 90% and average current of 200 μA with 0.4 pC CW bunch trains (250/499 MHz). Due to excellent dynamic vacuum conditions and a biased anode limiting ionized residual gas from reaching the photocathode, charge lifetimes >400 C with strained-superlattice GaAs/GaAsP are achieved [6, 7].

However, because the bremsstrahlung yield of positrons from electrons will be low ($< 10^{-4}$) a much higher beam current >1 mA is required with correspondingly higher bunch charge >2 pC. We expect to operate the gun in a range of 300-350 kV to manage the higher bunch charge and allow direct injection to the SRF 10 MV. To meet the anticipated demands we expect to re-design the gun cathode electrode in two ways, (a) to have a larger spherical radius to achieve and safely maintain higher gradient and (b) to accommodate a larger laser beam spot size to extend the charge lifetime. Additionally the cathode must be free of field emission so we plan to include the capability of applying 50 kV beyond the required beam voltage for high voltage gas conditioning.

The higher bunch charges also pose challenges for the initial bunching and acceleration of the beam. Space charge forces will repel the electrons and reverse the bunching as the beam drifts, where space charge effects typically degrade beam quality. To prevent this, we have kept the distance between the gun and the first accelerating element as short as possible and plan to compress the electron bunch from 40 ps (determined by the optical pulsed) to about 2 ps within a few meters prior to the SRF QCM.

The final section of the electron injector shapes the transverse emittance to match the acceptance for two CEBAF style CMs which accelerate the beam energy to about 120 MeV. A separate contribution to this conference [8] describes the electron injector in detail.

High Power Target for Positron Production

A conceptual design of the high power positron target has been developed. Tungsten has been chosen as the preferred target material. GEANT4 [9] simulations have been used to determine that a tungsten target thickness of 4 mm is optimal for maximizing the Figure-of-Merit [10] (FOM, defined as the product of the positron current and the square of their longitudinal polarization). The thermal power deposited by a 1 mA electron beam current of 120 MeV energy into 4 mm of tungsten has been estimated with FLUKA [11, 12] to be on the order of 17 kW. A typical target employed at JLab has less than 1 kW of electron beam power deposited into the target material. The only feasible cooling agent for the 17 kW target at Jefferson Lab would be water as the maximum cryogenic capacity for target cooling is less than 6 kW. Notably, the only JLab target that surpassed the 1 kW mark to date was the 2.5 kW liquid hydrogen target [13] for the Qweak experiment.

The design of the target has been done with ANSYS-Fluent [14] thermal simulations. Fluent calculations have shown that a static 4 mm thick tungsten target in a copper frame cooled by an internal water channel could sustain

about 1 kW of electron beam power safely. A 35 cm diameter and 4 mm thick tungsten target rotating at 2 Hz could safely dissipate the 17 kW beam power deposited in it while maintaining a maximum temperature below 1000 K. A con-

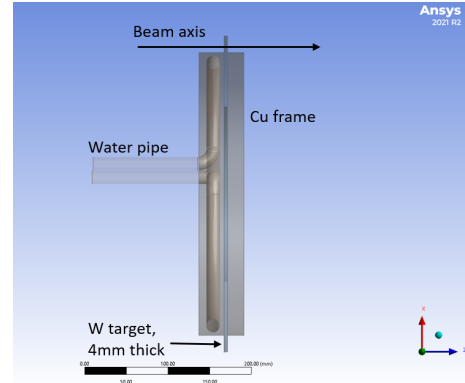


Figure 3: Side-view concept design of the rotating target.

cept of the rotating tungsten target is shown in Fig. 3, where the tungsten is an annular ring partially encased in a copper frame. The electron beam impinges onto the 4 mm tungsten annulus a few mm from the frame and 17.5 cm from the rotation axis. The conceptual design of the target will have to be engineered into a design that can be manufactured, operated and decommissioned safely. A detailed concept is evaluated in a separate contribution to this conference [15].

CW Positron Beam Formation

The generation of positrons in a thick target creates an exceptionally broad distribution in transverse and longitudinal phase space. A high field (B_1) quarter-wave transformer (QWT) located after the target decreases the transverse angular divergence of the positron distribution while also defining the central momentum of the positron polarization distribution to be collected. Following the high field region a low field (B_2) solenoid is used to manage the positron beam through an RF capture section. The solenoid fields B_1 and B_2 are optimized to maintain the large 4D transverse phase space of the beam [16] through this region.

A positron momentum spread $\delta p/p_0 < 1\%$ was chosen early on in the design in order to mitigate apertures in regions of large dispersion in the transport lines connecting the LERF to CEBAF. Although we have not settled on a final momentum spread this issue motivated us to include an RF capture section right after the QWT in our design studies in order to decrease the longitudinal energy spread as well as improve the transverse beam emittance.

Following the RF capture region the positron momenta is defined by a chicane beamline composed of quadrupoles and dipoles to create a correlation between positron energy and transverse position at its midpoint. After the chicane the positron beam is accelerated in a SRF CM to 123 MeV (an injection energy requirement for CEBAF 12 GeV) and transported through a bunch compression chicane to achieve a bunch length of a few picoseconds.

Ce ⁺ BAF Parameter	Status	Goal
p_0 [MeV/c]	60	60
$\sigma_{\delta p/p_0}$ [%]	0.68	± 1
σ_z [ps]	3	≤ 4
Normalized ϵ_n [mm mrad]	140	≤ 40
p_f [MeV/c]	123	123
$I_{e^+}(P > 60\%)$ [nA]	170	> 50

Table 1: Simulated parameters of the Ce+BAF injector.

In this contribution the chicane was optimized for 60 MeV/c positrons (maximum polarized FoM) while passing a 1% energy spread. Results of recent CW polarized positron beam simulations are shown in Tab. 1 relative to our present design goals. We have met or exceeded all goals except for the normalized emittance, which can be met by reducing the acceptance and reducing the positron beam current or increasing the drive beam power. A reference to earlier work on this topic was reported in [17].

Positron Spin Rotator

The precession of the electron beam polarization when accelerated at CEBAF to 12 GeV is more than 60 full revolutions. Experiments however most often require longitudinal or sometimes transverse spin polarization at their target. At CEBAF a 4π spin rotator consisting of two Wien filters with intervening solenoid magnets [18] is used to orient the spin at the injector to control the final spin polarization at the experiment. This is convenient when the beam energy is 100 keV and the required Wien filter field strengths are modest (e.g. E 1 MV/m and B 100 G). However, the positron beam production energies at the LERF are 10's of MeV and the final beam energy is >100 MeV, making a Wien filter impractical.

For Ce⁺BAF a higher energy spin rotator concept has been imagined. The proposed spin rotator scheme is shown in Fig. 4. Composed by interleaved dipole and solenoid fields [19] the small anomalous gyromagnetic factor for positrons (or even electrons) means the spin rotation in the solenoids is more effective than in the dipoles at lower energies. However, the dipole magnetic field is necessary to provide the desired spin rotation axis. Rotating the spin around the longitudinal solenoid and radial dipole fields, this spin rotator can provide a desired net spin rotation around the vertical axis in the horizontal plane. Notably in this design the dipole fields are arranged with net zero bending angle, leaving the beam trajectory intact and transparent to beam orbit perturbations. Further details of this design will be presented in a future presentation once on-going simulations are completed.

12 GeV Ce⁺BAF

Once the CW positron beam has been formed and the spin oriented it is ready for acceleration to higher energies. The positron beam is transported in a new tunnel connecting the

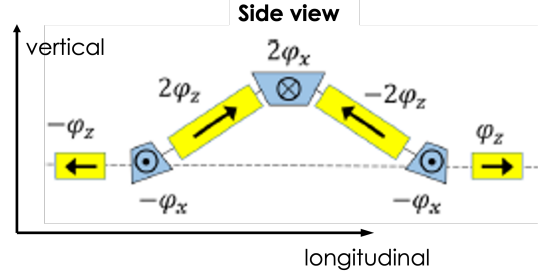


Figure 4: Spin rotator concept. ϕ_x : spin rotation around the radial axis, ϕ_z : spin rotation around the longitudinal axis.

east side of LERF to the south east corner of CEBAF near the entrance of the South Linac (Fig. 1). This new beamline features a double-bend achromat (DBA) to maintain small dispersion and a vertical achromatic translator to bring the beam to the elevation of the CEBAF South Linac tunnel near the ceiling. At this point a long FODO channel attached to the ceiling of the South Linac transports the beam to the west side of CEBAF where it is bent 180 degrees via a DBA-like lattice with low dispersion and is also isochronous. At the end of this long transport line a vertical achromat translator and horizontal bending magnets bring the beam to the start of the North Linac where it is injected. Additionally, each beamline also has a betatron matching section.

While this long beamline from LERF to CEBAF is designed for the 123 MeV/c positron beam it should also be suitable for an electron beam with energy up to 650 MeV/c to be compatible with a future upgrade of CEBAF to 22 GeV.

The CEBAF accelerator limits the maximum transverse emittance that one can transport because of the reduced acceptance at the extraction corners. We estimate that one can inject between 40 and 120 mm.mrad of normalized emittance at the front of the north linac [20]. In terms of longitudinal acceptance, we are planning to change the optics configuration for the first two recirculation arcs (east and west sides) in order to have smaller dispersion functions and an easily tunable momentum compaction. With these new optics we should expect to inject up to a percent of energy spread in the front of the north linac and transport a beam that has a longitudinal bunch length around 1 mm. A separate contribution to this conference [21] is exploring the admittance of the electron injector and first recirculation pass of CEBAF.

OUTLOOK

The Ce⁺BAF working group has developed a scheme to provide CEBAF with polarized positron beams with CW time structure. Early designs and simulated parameters combined with constraints are approaching the anticipated goals. Our focus in the coming months is to develop a white paper documenting in greater detail the technical approach and additional issues being addressed, but not reported in the length of these proceedings.

REFERENCES

- [1] J. Arrington *et al.*, “Physics with CEBAF at 12 GeV and Future Opportunities,” *Progress in Particle and Nuclear Physics*, vol. 127, p. 103 985, 2022.
doi:10.1016/j.pnpnp.2022.103985
- [2] A. Accardi *et al.*, “An experimental program with high duty-cycle polarized and unpolarized positron beams at Jefferson Lab,” *The European Physical Journal A*, vol. 57, no. 8, 2021.
doi:10.1140/epja/s10050-021-00564-y
- [3] D. Abbott *et al.*, “Production of Highly Polarized Positrons Using Polarized Electrons at MeV Energies,” *Phys. Rev. Lett.*, vol. 116, p. 214 801, 21 2016.
doi:10.1103/PhysRevLett.116.214801
- [4] C. Hernandez-Garcia *et al.*, “Performance and modeling of the JLAB IR FEL upgrade injector,” 2004. <https://www.osti.gov/biblio/834871>
- [5] P. Adderley *et al.*, “Load-locked dc high voltage gaas photo-gun with an inverted-geometry ceramic insulator,” *Physical Review Special Topics-Accelerators and Beams*, vol. 13, no. 1, p. 010 101, 2010.
- [6] P. Adderley *et al.*, “An overview of how parity-violating electron scattering experiments are performed at CEBAF,” *Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment*, p. 167 710, 2022.
- [7] J. Yuskowitz *et al.*, “Improving the operational lifetime of the cebaf photo-gun by anode biasing,” Thomas Jefferson National Accelerator Facility (TJNAF), Newport News, VA, Tech. Rep., 2021.
- [8] R. Kazimi, A. Hofler, C. Hernandez-Garcia, G. Palacios Serano, and J. Grames, “Polarized electron injector for positron capability at CEBAF 12 GeV,” *To appear in these proceedings (WEPA035)*,
- [9] S. Agostinelli *et al.*, “GEANT4—a simulation toolkit,” *Nucl. Instrum. Meth. A*, vol. 506, pp. 250–303, 2003.
doi:10.1016/S0168-9002(03)01368-8
- [10] S. Habet, A. Ushakov, and E. Voutier, “Characterization and optimization of polarized and unpolarized positron production,” Tech. Rep. JLAB-ACC-23-3794, 2023.
- [11] C. Ahdida *et al.*, “New Capabilities of the FLUKA Multi-Purpose Code,” *Frontiers in Physics*, vol. 9, p. 788 253, 2022.
doi:10.1007/s11665-016-2457-x
- [12] G. Batistoni *et al.*, “Overview of the FLUKA code,” *Annals Nucl. Energy*, vol. 82, pp. 10–18, 2015.
doi:10.1016/j.anucene.2014.11.007
- [13] J. Brock *et al.*, “The Qweak High Performance LH2 Target,” *arxiv.org, submitted to NIM-A*, pp. 1–52, 2023.
doi:10.48550/arXiv.2303.07497
- [14] ANSYS. www.ansys.com
- [15] A. Ushakov, C. Le Galliard, E. Voutier, C. Covrig, and J. Grames, “Conceptual design of a high-power target for positron production at CEBAF,” *To appear in these proceedings (WEPM120)*,
- [16] R. Chehab, “Etude de la production et du confinement d’un faisceau de positrons. Application à l’accélérateur linéaire d’Orsay,” Ph.D. dissertation, Université Paris-Sud, 1975.
- [17] S. Habet *et al.*, “Concept of a Polarized Positron Source for CEBAF,” *Proceedings of the 13th International Particle Accelerator Conference (IPAC’22), Bangkok, Thailand*, pp. 457–460, 2022.
doi:10.18429/JACoW-IPAC2022-MOPOTK012
- [18] J. Grames *et al.*, “Two wien filter spin flipper,” *Proceedings of 2011 Particle Accelerator Conference, New York, NY, USA*, p. 862, 2011.
- [19] Y. N. Filatov *et al.*, “Polarization control in spin-transparent hadron colliders by weak-field navigators involving lattice enhancement effect,” *Eur. Phys. J. C*, vol. 81, 11 2021.
doi:10.1140/epjc/s10052-021-09750-0
- [20] *Proceedings, International Workshop on Physics with Positrons at Jefferson Lab (JPos17): Newport News, VA, USA, September 12-15, 2017*, 2018.
- [21] A. Sy *et al.*, “Degradation beamline design at the CEBAF injector for machine acceptance studies,” *To appear in these proceedings (MOPM081)*,