


distances for beam measurements

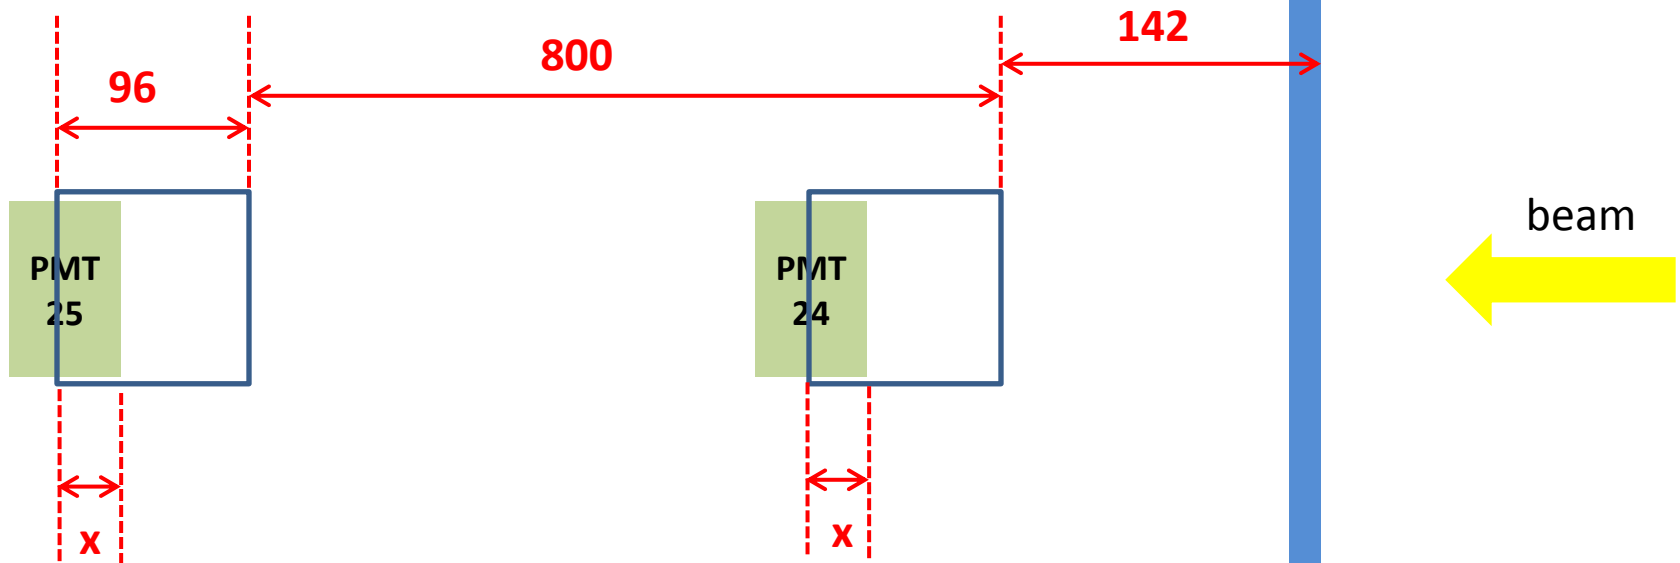

x =distance between the PMT entrance window and the edge of the support, it depends on how the PMT was placed

- $x=30$ with the HV red cable falling down straight (I usually put the PMT this way)
- $x=35$ up to the green adopter board
- $x=54$ up to the edge of the PMT holder